

# SideMountTrack



# SideMountTrack

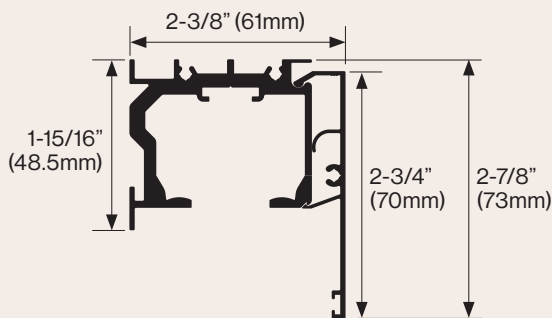
The CS SideMountTrack is an ideal surface sliding solution where vertical fixing space is limited. This system is side fixed through the track profile. It is popular when the top of the door opening is close to the ceiling and there isn't structural support for fixture above the track.

Compatible with SofStop® soft open / soft close

## Features

- Available as a single track set-up only, i.e. no double or triple track versions are available.
- 304 stainless steel components available for corrosive environments.
- Track can be configured to suit Bi-Parting doors.
- Fascia may be anodized or powder coated. Standard finishes: Clear or Bronze Anodized. Inquire about custom colors.

## Product Specifications



## Technical Information

Fascia Finish	Clear or Bronze Anodized Aluminum
Track Finish	Milled Aluminum
Door Thickness	1-3/8" to 1-3/4" (35-45mm)
Max Door Weight	Standard: 240kg (500lb) SofStop: 120kg (264lb)
Carriage Pack	M6 (200lb), M8 (500lb), SofStop, SofStop HD

## How to Specify

1. Specify door thickness: 1-3/8" and 1-3/4" doors
2. Specify track length  
Available in 6, 8, 12, and 24' pre-cut lengths
3. Choose a carriage pack (one per door)  
(Includes carriages, mounting plates, T-Guide, fixing screws, adjusting wrench and installation instructions)
  - a. M6 (200 lb)
  - b. M8 (500lb)
  - c. SofStop
  - d. SofStop HD
  - e. CS Door Collection System (For multiple tracks)  
(includes M6 or M8 carriage pack plus door collection system for 2 door or 3 door setup)
4. Fascia and End Caps (Optional): Specify finish

## SofStop® Features & Options

- High quality mechanism independently tested to 100,000 cycles
- Soft close mechanism is hidden from sight, yet remains fully serviceable




Standard	M6 (200lb/90kg)		
	M8 (500lb/240kg)		
CS SofStop	Minimum Door Width		
	No Stop	1 Stop	2 Stops
0 - 200 lb (90kg)	23" (584mm)	26" (660mm)	28" (711mm)
CS SofStop HD	Minimum Door Width		
	No Stop	1 Stop	2 Stops
0 - 350 lb (160kg)	26" (660mm)	29" (737mm)	31" (787mm)

© All copyright and other property in this document is reserved by Cavity Sliders USA Inc. Details and specifications are subject to change without notice. Whilst all care is taken to ensure the accuracy of all information, no responsibility will be accepted for any errors or omissions. 12/2024









## SideMountTrack Product Codes

### Tracks

Item	Description	Length	Code
	CS SideMountTrack Kit (including fascia and end caps)  Suits 1-3/8" to 1-3/4" door thickness  Natural (Clear) Anodized	6ft	TSCTSMNA-6
		8ft	TSCTSMNA-8
		12ft	TSCTSMNA-12
		24ft	TSCTSMNA-24
		Custom	TSCTSMNA-NSS
	CS SideMountTrack Kit (including fascia and end caps)  Suits 1-3/8" to 1-3/4" door thickness  Bronze Anodized	6ft	TSCTSMBA-6
		8ft	TSCTSMBA-8
		12ft	TSCTSMBA-12
		24ft	TSCTSMBA-24
		Custom	TSCTSMBA-NSS
	CS SideMountTrack (Carriage Section only)	Custom	ZA00351

### Carriage Packs

Item	Description	Code
	M6 (200lb) with no track stops	DKM0601
	M6 (200lb) with 1 track stop	DKM0611
	M6 (200lb) with 2 track stops	DKM0621
	M8 (500lb) with no track stops	DKM0801
	M8 (500lb) with 1 track stop	DKM0811
	M8 (500lb) with 2 track stops	DKM0821

© All copyright and other property in this document is reserved by Cavity Sliders USA Inc. Details and specifications are subject to change without notice. Whilst all care is taken to ensure the accuracy of all information, no responsibility will be accepted for any errors or omissions. 12/2024

**CavitySliders.com**

sales@cavitysliders.com

(888) 466-0030



Specs and Instructions

